



Workshop Manual

Protected by copyright. Any reproduction, in part or in whole, is not permitted unless authorized by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Audi A1 2011 ➤ ,
Audi A1 Sportback 2018 ➤ ,
Audi A2 2001 ➤ , Audi A3 1997 ➤ ,
Audi A3 2004 ➤ , Audi A3 2013 ➤ ,
Audi A3 Cabriolet 2008 ➤ ,
Audi A4 1995 ➤ , Audi A4 2001 ➤ ,
Audi A4 2008 ➤ , Audi A4 2015 ➤ ,
Audi A4 Cabriolet 2003 ➤ ,
Audi A5 2016 ➤ ,
Audi A5 Cabriolet 2017 ➤ ,
Audi A5 Coupé 2008 ➤ ,
Audi A5 Sportback 2010 ➤ ,
Audi A6 1998 ➤ , Audi A6 2005 ➤ ,
Audi A6 2011 ➤ , Audi A6 2019 ➤ ,
Audi A6 China 2012 ➤ ,
Audi A7 Sportback 2011 ➤ ,
Audi A7 Sportback 2018 ➤ ,
Audi A8 1994 ➤ , Audi A8 2003 ➤ ,
Audi A8 2010 ➤ , Audi A8 2018 ➤ ,
Audi Q2 2016 ➤ , Audi Q3 2012 ➤ ,
Audi Q3 2019 ➤ , Audi Q5 2008 ➤ ,
Audi Q5 2017 ➤ , Audi Q7 2007 ➤ ,
Audi Q7 2016 ➤ , Audi Q8 2018 ➤ ,
Audi R8 2007 ➤ , Audi R8 2015 ➤ ,
Audi TT 1999 ➤ , Audi TT 2007 ➤ ,
Audi TT 2015 ➤ , Audi e-tron 2019 ➤

Fitting instructions: radio communication systems

Edition 11.2018



List of Workshop Manual Repair Groups

Repair Group

91 - Radio, telephone, navigation



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Technical information should always be available to the foremen and mechanics, because their careful and constant adherence to the instructions is essential to ensure vehicle road-worthiness and safety. In addition, the normal basic safety precautions for working on motor vehicles must, as a matter of course, be observed.



Contents

91 - Radio, telephone, navigation	1
1 Retrofitting transceivers	1
1.1 General notes	1
1.2 Transmission power levels and possible fitting locations	1
1.3 Power supply	1
1.4 Aerial and aerial wire	2
1.5 Other auxiliary equipment	2
1.6 Overview - battery A /transmitter and receiver unit/fuse/wiring harness	2
1.7 Transmission power levels and aerial fitting locations for A1 (from model year 2011 up to model year 2012)	3
1.8 Transmission power levels and aerial fitting locations for A1 (from model year 2013 up to model year 2018)	4
1.9 Transmission power levels and aerial fitting locations for A1 (from model year 2019 onwards)	4
1.10 Transmission power levels and aerial fitting locations for A2 (from model year 2001 onwards)	5
1.11 Transmission power levels and aerial fitting locations for A3 (from model year 1997 up to model year 2003)	6
1.12 Transmission power levels and aerial fitting locations for A3 (from model year 2004 up to model year 2012)	6
1.13 Transmission power levels and aerial fitting locations for A3, A3 Sportback (from model year 2013 up to week 29/2013)	7
1.14 Transmission power levels and aerial fitting locations for A3, A3 Sportback, A3 Saloon (from week 30/2013 onwards)	7
1.15 Transmission power levels and aerial fitting locations for A3 Cabriolet (from model year 2008 up to model year 2014)	8
1.16 Transmission power levels and aerial fitting locations for A3 Cabriolet (from model year 2015 onwards)	9
1.17 Transmission power levels and aerial fitting locations for A4 (from model year 1995 up to model year 2000)	9
1.18 Transmission power levels and aerial fitting locations for A4 (from model year 2001 up to model year 2007)	11
1.19 Transmission power levels and aerial fitting locations for A4 (from model year 2008 up to week 10/2012)	13
1.20 Transmission power levels and aerial fitting locations for A4 (from week 11/2012 up to model year 2015)	14
1.21 Transmission power levels and aerial fitting locations for A4 (from model year 2016 onwards)	15
1.22 Transmission power levels and aerial fitting locations for A4 Cabriolet (from model year 2003 onwards)	16
1.23 Transmission power levels and aerial fitting locations for A5 Coupé (from model year 2008 up to week 10/2012)	17
1.24 Transmission power levels and aerial fitting locations for A5 Coupé (from week 11/2012 up to model year 2016)	17
1.25 Transmission power levels and aerial fitting locations for A5 Coupé (from model year 2017 onwards)	18
1.26 Transmission power levels and aerial fitting locations for A5 Sportback (from model year 2010 up to week 10/2012)	18
1.27 Transmission power levels and aerial fitting locations for A5 Sportback (from week 11/2012 up to model year 2016)	19
1.28 Transmission power levels and aerial fitting locations for A5 Sportback (from model year 2017 onwards)	19
1.29 Transmission power levels and aerial fitting locations for A5 Cabriolet (from model year 2009 up to week 10/2012)	20
1.30 Transmission power levels and aerial fitting locations for A5 Cabriolet (from week 11/2012 up to week 44/2016)	21
1.31 Transmission power levels and aerial fitting locations for A5 Cabriolet (from week 45/2016 onwards)	21



1.32	Transmission power levels and aerial fitting locations for A6 (from model year 1998 up to model year 2004)	22
1.33	Transmission power levels and aerial fitting locations for A6 (from model year 2005 up to model year 2010)	23
1.34	Transmission power levels and aerial fitting locations for A6 (from model year 2011 up to model year 2012)	24
1.35	Transmission power levels and aerial fitting locations for A6 (from model year 2013 up to model year 2014)	25
1.36	Transmission power levels and aerial fitting locations for A6 (from model year 2015 up to model year 2018)	26
1.37	Transmission power levels and aerial fitting locations for A6 (from model year 2019 onwards)	28
1.38	Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2011 up to model year 2012)	29
1.39	Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2013 up to model year 2014)	30
1.40	Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2015 up to model year 2018)	30
1.41	Transmission power levels and aerial fitting locations for A7 (from model year 2019 onwards)	31
1.42	Transmission power levels and aerial fitting locations for A8 (from model year 1994 up to model year 2002)	32
1.43	Transmission power levels and aerial fitting locations for A8 (from model year 2003 up to model year 2009)	32
1.44	Transmission power levels and aerial fitting locations for A8 (from model year 2010 up to model year 2012)	33
1.45	Transmission power levels and aerial fitting locations for A8 (from week 22/2012 up to week 35/2013)	33
1.46	Transmission power levels and aerial fitting locations for A8 (from week 36/2013 up to model year 2017)	34
1.47	Transmission power levels and aerial fitting locations for A8 (from model year 2018 onwards)	34
1.48	Transmission power levels and aerial fitting locations for Q2 (from model year 2017 onwards)	35
1.49	Transmission power levels and aerial fitting locations for Q3 (from model year 2012 up to model year 2014)	36
1.50	Transmission power levels and aerial fitting locations for Q3 (from model year 2015 up to model year 2018)	36
1.51	Transmission power levels and aerial fitting locations for Q3 (from model year 2019 onwards)	37
1.52	Transmission power levels and aerial fitting locations for Q5 (from model year 2008 up to model year 2012)	38
1.53	Transmission power levels and aerial fitting locations for Q5 (from model year 2013 up to model year 2016)	38
1.54	Transmission power levels and aerial fitting locations for Q5 (from model year 2017 onwards)	39
1.55	Transmission power levels and aerial fitting locations for Q7 (from model year 2007 up to model year 2012)	39
1.56	Transmission power levels and aerial fitting locations for Q7 (from model year 2013 up to model year 2015)	40
1.57	Transmission power levels and aerial fitting locations for Q7 (from model year 2016 onwards)	40
1.58	Transmission power levels and aerial fitting locations for Q8 (from model year 2019 onwards)	41
1.59	Transmission power levels and aerial fitting locations for R8 (from model year 2007 up to model year 2015)	42
1.60	Transmission power levels and aerial fitting locations for R8 (from model year 2016 onwards)	42
1.61	Transmission power levels and aerial fitting locations for R8 Spyder (from model year 2010 up to model year 2016)	43
1.62	Transmission power levels and aerial fitting locations for R8 Spyder (from model year 2017 onwards)	43



1.63	Transmission power levels and aerial fitting locations for TT (from model year 1999 up to model year 2006)	44
1.64	Transmission power levels and aerial fitting locations for TT (from model year 2007 up to model year 2014)	45
1.65	Transmission power levels and aerial fitting locations for TT (from model year 2015 onwards)	46
1.66	Transmission power levels and aerial fitting locations for e-tron (from model year 2019 onwards)	47

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



91 – Radio, telephone, navigation

1 Retrofitting transceivers

(ARL006129; Edition 11.2018)

1.1 General notes

Disconnect negative terminal of battery - A- before fitting radio communication and telephone systems (transceivers) ⇒ Electrical system; Rep. gr. 27 ; Battery .

Use applicable current flow diagrams ⇒ Current flow diagrams, Electrical fault finding and Fitting locations.

Use cable ties to secure wiring harnesses. Pad plug-in couplings with foam sheaths.

Note operating and installation instructions issued by the manufacturers of mobile telephones, radio communication systems and aerials ⇒ Operating instructions .

- ◆ Disconnecting and connecting battery - A- ⇒ Electrical system; Rep. gr. 27 .
- ◆ Current flow diagrams, fuse assignment and fitting locations ⇒ Current flow diagrams, Electrical fault finding and Fitting locations.
- ◆ Removing and installing trim ⇒ General body repairs, interior; Rep. gr. 70 .
- ◆ Removing and installing factory-fitted systems ⇒ Communication; Rep. gr. 91 .
- ◆ Repairing aerial wiring ⇒ Electrical system; General information; Rep. gr. 97 ; Repairing wiring harnesses and connectors; Repairing aerial wires
- ◆ Repairing wiring harnesses ⇒ Electrical system; General information; Rep. gr. 97 ; Repairing wiring harnesses and connectors

1.2 Transmission power levels and possible fitting locations

Audi approves the installation and operation of radio communication systems, provided that the transmission power levels at the aerial base do not exceed the values listed in the table for the relevant model. The specified aerial fitting locations and transmission power levels are given in the tables ⇒ [page 3](#) .

It may be necessary to reduce transmission power to comply with the maximum permitted values as per VDE 0848 Part 2 (maximum permitted field strength with respect to personal safety).

1.3 Power supply

The battery - A- is used for connection of the positive and negative cables when performing service installation of radio communication systems to the vehicle.

An additional wiring harness has to be made up accordingly:

- ◆ Positive cable: 2.5 mm thick, red cable
- ◆ Negative cable: 2.5 mm thick, brown cable
- ◆ Terminal 15 cable: 1.5 mm thick, black cable

The positive cable must be fitted with a fuse in the immediate vicinity of the battery - A- . This requires you to fit a fuse holder



next to the battery - A- . The positive and negative cables must be covered with an insulating sheath. Appropriate terminals must be fitted on the battery end. For the device end, proceed according to the operating instructions for radio communication systems
⇒ Operating instructions .

Additional wiring harness must be routed separately from vehicle wiring (distance > 10 cm).



Note

Intertwining of standard wiring is preferable to parallel routing.

1.4 Aerial and aerial wire

Use a screened wire between the transmitter/receiver unit and the aerial. The screen must be connected to the unit and aerial end. At the same time ensure that there is a good and permanent earth connection between aerial base wire and vehicle body.

The transmission system must be tuned to prevent sheath waves on the aerial wire. This should be ensured by performing a power measurement to check and tune the radio communication system.

"On-Glass" aerials can only be fitted on vehicles without insulating glass.

1.5 Other auxiliary equipment

Installation of other electronic equipment, such as a business package (TV, FAX) or household package (electric refrigerator box) is only permitted if such items bear a CE or e mark. Power is also to be supplied by way of a separate wiring harness and provided with fuse protection.

1.6 Overview - battery - A- /transmitter and receiver unit/fuse/wiring harness



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



A - Battery - A-

- ☐ Installation position, disconnecting ⇒ Electrical system; Rep. gr. 27

B - Telephone transmitter and receiver unit

- ☐ Installation position, removing and installing ⇒ Communication; Rep. gr. 91

C - Wiring harness

- ☐ Has to be made up
- ☐ Positive wire (terminal 30) 2.5 Ø (red)
- ☐ Earth wire (terminal 31) 2.5 Ø (brown)
- ☐ Positive wire (terminal 15a) 1.5 Ø (black)

D - Fuse holder

- ☐ In immediate vicinity of battery - A-

E - Terminal 15a


- ☐ Always connected to output of terminal 15a
- ☐ Wiring must be protected by a fuse
- ☐ Fuse max. 15 A

F - To starter - B-

- ☐ Original wire

G - Body earth

- ☐ Immediately next to battery - A-

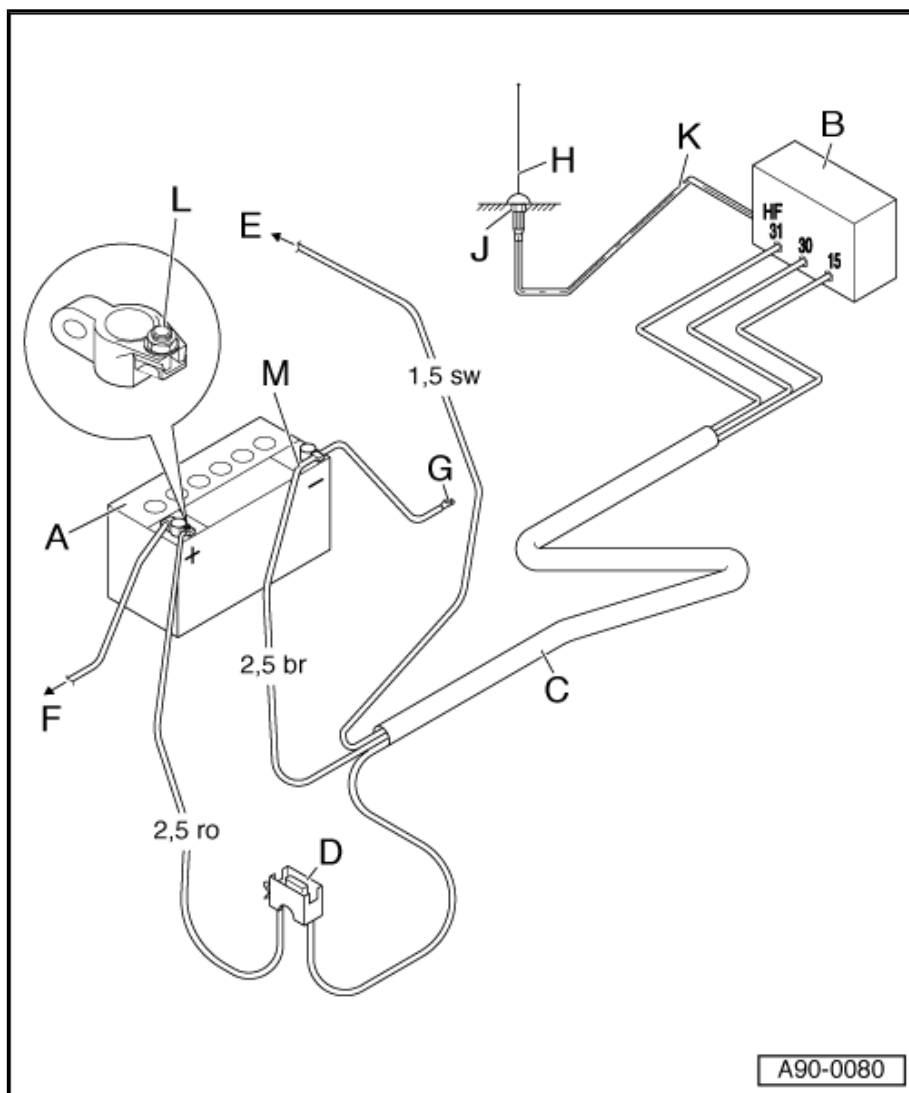

H - Transmission/reception aerial

- ☐ The specified aerial fitting locations and transmission power levels are given in the tables ⇒ [page 3](#) .

J - Aerial earth

- ☐ Good, firm connection/corrosion protection

K - Screened aerial wire

- ☐ Wire with coaxial connector

L - Positive connection

- ☐ Attach red cable with terminal A6-2.5 beneath nut
- ☐ Route wiring harness separately if possible

M - Negative cable

- ☐ Attach brown cable with terminal A6-2.5 beneath nut
- ☐ Route wiring harness separately if possible

This document is not to be reproduced, stored in a retrieval system, or used for commercial purposes, in part or in whole, is not permitted unless authorized by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.7 Transmission power levels and aerial fitting locations for A1 (from model year 2011 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
2 m band	50 (eff.)	Centre of roof (rear)
70 cm band	50 (eff.)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (front or rear)
23 cm band	25 (PEP)	Centre of roof (rear)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (front or rear)
UMTS network	10 (PEP)	Centre of roof (front or rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.8 Transmission power levels and aerial fitting locations for A1 (from model year 2013 up to model year 2018)

Designation	P _{max} (Watt)	Specified aerial fitting locations
2 m band (135...175 MHz)	50 (eff.)	Rear of roof (15 to 25 cm from rear roof edge)
70 cm band (430...480 MHz)	50 (eff.)	Rear of roof (15 to 25 cm from rear roof edge)
Telephone, GSM (820...980 MHz)	20 (PEP)	Front centre of roof (position of standard aerial) Rear of roof (15 to 25 cm from rear roof edge)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Front centre of roof (position of standard aerial) Rear of roof (15 to 25 cm from rear roof edge)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Front centre of roof (position of standard aerial) Rear of roof (15 to 25 cm from rear roof edge)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.9 Transmission power levels and aerial fitting locations for A1 (from model year 2019 onwards)


Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave/CB radio (< 30 MHz)	100 (PEP)	Rear bumper
4 m band (68...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (144...174 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (410...470 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...395, 406...420, 450...460, 806...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, GSM (824...850 MHz, 876...915 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1710...1785 MHz, 1850...1910 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1885...2025 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.10 Transmission power levels and aerial fitting locations for A2 (from model year 2001 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper
4 m band	20 (eff.)	Rear left wing
2 m band	50 (eff.)	Rear left wing
70 cm band	50 (eff.)	Rear left wing
Telephone, 450 MHz GSM	25 (eff.)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear left side windows "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear left side windows "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear left side windows "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.11 Transmission power levels and aerial fitting locations for A3 (from model year 1997 up to model year 2003)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of roof (rear) Rear bumper
4 m band	20 (eff.)	Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (rear) Rear right side panel
2 m band	20 (eff.)	Front of roof (15 cm from edge of windscreen in centre of vehicle) Centre of roof (rear) Rear left or right side panel
70 cm band	50 (eff.)	Centre of roof (rear) Rear right side panel
Telephone, 450 MHz GSM	25 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side windows "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side windows "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side windows "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.12 Transmission power levels and aerial fitting locations for A3 (from model year 2004 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
4 m band	20 (eff.)	Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (rear)
70 cm band	50 (eff.)	Centre of roof (rear)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear)
Bluetooth (2400-2483 MHz)	500 mW	Under front passenger's seat



Designation	P _{max} (Watt)	Specified aerial fitting locations
UMTS network	10 W	Rear of roof Centre of rear lid
Short-range radar (76.5 GHz)	< 10 mW	Behind radiator grille

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.13 Transmission power levels and aerial fitting locations for A3, A3 Sportback (from model year 2013 up to week 29/2013)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.14 Transmission power levels and aerial fitting locations for A3, A3 Sportback, A3 Saloon (from week 30/2013 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.15 Transmission power levels and aerial fitting locations for A3 Cabriolet (from model year 2008 up to model year 2014)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	10 (PEP)	Centre of rear lid Rear bumper
4 m band	10 (eff.)	Centre of rear lid Rear left wing
2 m band	10 (eff.)	Centre of rear lid Rear left wing
70 cm band	10 (eff.)	Centre of rear lid Rear bumper
Telephone, 900 MHz GSM	10 (PEP)	Top centre of windscreen
Telephone, 1800 MHz GSM	10 (PEP)	Top centre of windscreen
Bluetooth (2400-2483 MHz)	500 mW	Under front passenger's seat
UMTS network	10 mW	Top centre of windscreen
Short-range radar (76.5 GHz)	< 10 mW	Behind radiator grille

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

with respect to the correctness of information in this document. Copyright by AUDI AG.

1.16 Transmission power levels and aerial fitting locations for A3 Cabriolet (from model year 2015 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Rear lid
2 m band (135...175 MHz)	50 (eff.)	Rear lid
70 cm band (430...480 MHz)	50 (eff.)	Rear lid
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Rear lid
Telephone, GSM (820...980 MHz)	2 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.17 Transmission power levels and aerial fitting locations for A4 (from model year 1995 up to model year 2000)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of rear lid Rear bumper
4 m band	20 (eff.)	Rear of roof (32.5 cm from edge of window in centre of vehicle) Rear left wing



Designation	P _{max} (Watt)	Specified aerial fitting locations
2 m band	50 (eff.)	Centre of rear lid, rear bumper Rear left wing
2 m band	20 (eff.)	Rear of roof (32.5 cm from edge of window in centre of vehicle) Rear left or right wing
70 cm band	50 (eff.)	Centre of rear lid Rear right wing
Telephone, 450 MHz GSM	25 (eff.)	Rear left or right wing Rear window, top edge of window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side windows
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side windows

eff. = effective transmission power

PEP = Peak Envelope Power

**WARNING**

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of roof (rear) Rear bumper
4 m band	20 (eff.)	Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (rear) Rear right side panel
2 m band	20 (eff.)	Centre of roof (rear) Rear left or right side panel
70 cm band	50 (eff.)	Centre of roof (rear) Rear right side panel
Telephone, 450 MHz GSM	25 (eff.)	Rear of roof (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear of roof (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Rear of roof (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Cabriolet

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	10 (PEP)	Rear bumper
4 m band	10 (eff.)	Rear right wing
2 m band	10 (eff.)	Rear left or right wing Rear bumper
70 cm band	10 (eff.)	Rear bumper
Telephone, 450 MHz GSM	10 (eff.)	Rear left or right wing
Telephone, 900 MHz GSM	10 (PEP)	Rear left or right wing
Telephone, 1800 MHz GSM	10 (PEP)	Rear left or right wing

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.18 Transmission power levels and aerial fitting locations for A4 (from model year 2001 up to model year 2007)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of rear lid Rear bumper
4 m band	20 (eff.)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left wing
2 m band	50 (eff.)	Centre of rear lid, rear bumper Rear left wing
2 m band	20 (eff.)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left or right wing
70 cm band	50 (eff.)	Centre of rear lid Rear left wing
Telephone, 450 MHz GSM	25 (eff.)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left or right wing



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, 900 MHz GSM	20 (PEP)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left or right wing Rear left or right side windows "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left or right wing Rear left or right side windows "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

or commercial purposes, in part or in whole, is not permitted without the prior written consent of AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear bumper
4 m band	20 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Centre of roof (61 cm from rear window in centre of vehicle)
2 m band	50 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Centre of roof (61 cm from rear window in centre of vehicle)
2 m band	20 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Centre of roof (61 cm from rear window in centre of vehicle)
70 cm band	50 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 450 MHz GSM	25 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.19 Transmission power levels and aerial fitting locations for A4 (from model year 2008 up to week 10/2012)

Saloon

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Audi AG. Audi AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by Audi AG.

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket Centre of rear lid
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
70 cm band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof (rear)
70 cm band	50 (eff.)	Centre of roof (rear)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.20 Transmission power levels and aerial fitting locations for A4 (from week 11/2012 up to model year 2015)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.21 Transmission power levels and aerial fitting locations for A4 (from model year 2016 onwards)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.22 Transmission power levels and aerial fitting locations for A4 Cabriolet (from model year 2003 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	10 (PEP)	Rear bumper
4 m band	10 (eff.)	Rear left wing
2 m band	10 (eff.)	Rear left wing
70 cm band	10 (eff.)	Rear left wing
Telephone, 450-MHz GSM	10 (eff.)	Rear left wing
Telephone, 900 MHz GSM	10 (PEP)	Centre of rear lid Rear left wing
Telephone, 1800 MHz GSM	10 (PEP)	Centre of rear lid Rear left wing

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.23 Transmission power levels and aerial fitting locations for A5 Coupé (from model year 2008 up to week 10/2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket Centre of rear lid
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
70 cm band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (centre) Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (centre) Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.24 Transmission power levels and aerial fitting locations for A5 Coupé (from week 11/2012 up to model year 2016)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.25 Transmission power levels and aerial fitting locations for A5 Coupé (from model year 2017 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.26 Transmission power levels and aerial fitting locations for A5 Sportback (from model year 2010 up to week 10/2012)


Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket Centre of rear lid
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)



Designation	P _{max} (Watt)	Specified aerial fitting locations
70 cm band	50 (eff.)	Centre of roof (centre) Centre of roof, rear (15-30 cm from edge of rear window in centre of vehicle)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.27 Transmission power levels and aerial fitting locations for A5 Sportback (from week 11/2012 up to model year 2016)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.28 Transmission power levels and aerial fitting locations for A5 Sportback (from model year 2017 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power

**WARNING**

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.29 Transmission power levels and aerial fitting locations for A5 Cabriolet (from model year 2009 up to week 10/2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper/rear lid
4 m band	20 (eff.)	Centre of rear lid, rear left wheel housing
2 m band	50 (eff.)	Centre of rear lid, rear left wheel housing
70 cm band	50 (eff.)	Centre of rear lid, rear left wheel housing
Telephone, 900 MHz GSM	20 (PEP)	Centre of rear lid, rear left wheel housing
Telephone, 1800 MHz GSM	10 (PEP)	Centre of rear lid, rear left wheel housing

eff. = effective transmission power

PEP = Peak Envelope Power

**WARNING**

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.




1.30 Transmission power levels and aerial fitting locations for A5 Cabriolet (from week 11/2012 up to week 44/2016)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	10 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	10 (eff.)	Centre of rear lid, rear left wheel housing
2 m band (135...175 MHz)	10 (eff.)	Centre of rear lid, rear left wheel housing
70 cm band (430...480 MHz)	10 (eff.)	Centre of rear lid, rear left wheel housing
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of rear lid, rear left wheel housing
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of rear lid, rear left wheel housing
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of rear lid, rear left wheel housing

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.31 Transmission power levels and aerial fitting locations for A5 Cabriolet (from week 45/2016 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	10 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	10 (eff.)	Rear lid
2 m band (135...175 MHz)	10 (eff.)	Rear lid
70 cm band (430...480 MHz)	10 (eff.)	Rear lid
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	10 (PEP)	Rear lid
Telephone, GSM (820...980 MHz)	2 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.32 Transmission power levels and aerial fitting locations for A6 (from model year 1998 up to model year 2004)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of rear lid Rear bumper
4 m band	20 (eff.)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left wing
2 m band	50 (eff.)	Centre of rear lid Rear bumper Rear right wing
2 m band	20 (eff.)	Rear of roof (22 cm from edge of window in centre of vehicle) Rear left or right wing
70 cm band	50 (eff.)	Centre of rear lid Rear right wing
Telephone, 450 MHz GSM	25 (eff.)	Rear left or right wing Rear window, top edge of window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side window
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side window

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Centre of roof (rear) Rear bumper
4 m band	20 (eff.)	Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (rear) Rear right side panel



Designation	P _{max} (Watt)	Specified aerial fitting locations
2 m band	20 (eff.)	Centre of roof (rear) Rear left or right side panel
70 cm band	50 (eff.)	Centre of roof (rear) Rear right side panel
Telephone, 450 MHz GSM	25 (eff.)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (same as radio, telephone and navigation system aerial - R52-) Rear left or right side window "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.33 Transmission power levels and aerial fitting locations for A6 (from model year 2005 up to model year 2010)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper Edge of roof (centre) near rear window
4 m band	20 (eff.)	Rear left wing Edge of roof (centre) near rear window
2 m band	50 (eff.)	Rear left wing Edge of roof (centre) near rear window
70 cm band	50 (eff.)	Rear left wing Edge of roof (centre) near rear window
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Edge of roof (centre) near rear window
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Edge of roof (centre) near rear window

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper Edge of roof (centre) near rear window
4 m band	20 (eff.)	Rear left side panel Edge of roof (centre) near rear window
2 m band	50 (eff.)	Rear left side panel Edge of roof (centre) near rear window
70 cm band	50 (eff.)	Rear left side panel Edge of roof (centre) near rear window
Telephone, 900 MHz GSM	20 (PEP)	Rear left side panel Edge of roof (centre) near rear window
Telephone, 1800 MHz GSM	10 (PEP)	Rear left side panel Edge of roof (centre) near rear window

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.34 Transmission power levels and aerial fitting locations for A6 (from model year 2011 up to model year 2012)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Centre of rear lid
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.35 Transmission power levels and aerial fitting locations for A6 (from model year 2013 up to model year 2014)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Centre of rear lid
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power

protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.36 Transmission power levels and aerial fitting locations for A6 (from model year 2015 up to model year 2018)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.37 Transmission power levels and aerial fitting locations for A6 (from model year 2019 onwards)

Saloon

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Avant


Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING


If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.38 Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2011 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (position for roof aerial - R216- , standard)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (position for roof aerial - R216- , standard)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.39 Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2013 up to model year 2014)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.40 Transmission power levels and aerial fitting locations for A7 Sportback (from model year 2015 up to model year 2018)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear (near rear window) Rear left wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)



Designation	P _{max} (Watt)	Specified aerial fitting locations
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.41 Transmission power levels and aerial fitting locations for A7 (from model year 2019 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.42 Transmission power levels and aerial fitting locations for A8 (from model year 1994 up to model year 2002)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper
4 m band	20 (eff.)	Rear right wing
2 m band	50 (eff.)	Rear bumper Rear right wing
2 m band	20 (eff.)	Rear left or right wing
70 cm band	50 (eff.)	Rear right wing
Telephone, 450 MHz GSM	25 (eff.)	Rear left or right wing Rear window, top edge of window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side window
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side window

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability

1.43 Transmission power levels and aerial fitting locations for A8 (from model year 2003 up to model year 2009)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Rear left or right wing
2 m band	50 (eff.)	Rear left or right wing
70 cm band	50 (eff.)	Rear right wing
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Top right of rear window (in black area) "On-Glass"
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Top right of rear window (in black area) "On-Glass"

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



1.44 Transmission power levels and aerial fitting locations for A8 (from model year 2010 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Rear left or right wing
2 m band	50 (eff.)	Rear left or right wing
70 cm band	50 (eff.)	Rear right wing
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof, rear (position for roof aerial - R216-)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof, rear (position for roof aerial - R216-)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.45 Transmission power levels and aerial fitting locations for A8 (from week 22/2012 up to week 35/2013)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Rear left wing or rear right wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Rear left wing or rear right wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Rear left wing or rear right wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear Rear left wing or rear right wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial) Left/right section of bumper (on bolt connection for longitudinal member) Centre of bumper
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial) Left/right section of bumper (on bolt connection for longitudinal member) Centre of bumper
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial) Left/right section of bumper (on bolt connection for longitudinal member) Centre of bumper

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.46 Transmission power levels and aerial fitting locations for A8 (from week 36/2013 up to model year 2017)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle)
2 m band (135...175 MHz)	50 (eff.)	Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle)
70 cm band (430...480 MHz)	50 (eff.)	Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof, rear Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial) Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle) Rear left/right section of bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial) Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle) Rear left/right section of bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial) Rear left wing/rear right wing (10 to 30 cm from rear edge of vehicle) Rear left/right section of bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.47 Transmission power levels and aerial fitting locations for A8 (from model year 2018 onwards)


Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

with respect to the correctness of information in this document. Copyright by AUDI AG. AUDI AG does not guarantee or accept any liability for reproduction or use of this document for commercial purposes, in part or in whole, is not permitted without the written consent of AUDI AG.

1.48 Transmission power levels and aerial fitting locations for Q2 (from model year 2017 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.49 Transmission power levels and aerial fitting locations for Q3 (from model year 2012 up to model year 2014)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.50 Transmission power levels and aerial fitting locations for Q3 (from model year 2015 up to model year 2018)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.51 Transmission power levels and aerial fitting locations for Q3 (from model year 2019 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave/CB radio (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (68...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (144...174 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (410...470 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...395, 406...420, 450...460, 806...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (824...850 MHz, 876...915 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1710...1785 MHz, 1850...1910 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1885...2025 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Roof spoiler (right-side) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.52 Transmission power levels and aerial fitting locations for Q5 (from model year 2008 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof (rear)
70 cm band	50 (eff.)	Centre of roof (rear)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.53 Transmission power levels and aerial fitting locations for Q5 (from model year 2013 up to model year 2016)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	10 (PEP)	Centre of roof (rear)
Telephone, GSM (1700...1900 MHz)	5 (PEP)	Centre of roof (rear)
Telephone, UMTS network (1900...2100 MHz)	5 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.54 Transmission power levels and aerial fitting locations for Q5 (from model year 2017 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.55 Transmission power levels and aerial fitting locations for Q7 (from model year 2007 up to model year 2012)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Towing bracket
4 m band	20 (eff.)	Centre of roof (centre) Centre of roof (rear)
2 m band	50 (eff.)	Centre of roof (centre) Centre of roof (rear)
70 cm band	50 (eff.)	Centre of roof (rear)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.56 Transmission power levels and aerial fitting locations for Q7 (from model year 2013 up to model year 2015)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear), centre of roof (centre)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear), centre of roof (centre)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 410...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	20 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, GSM (1700...1900 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)
Telephone, UMTS network (1900...2100 MHz)	10 (PEP)	Centre of roof, rear (position for standard roof aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.57 Transmission power levels and aerial fitting locations for Q7 (from model year 2016 onwards)


Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)



Designation	P _{max} (Watt)	Specified aerial fitting locations
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.58 Transmission power levels and aerial fitting locations for Q8 (from model year 2019 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.59 Transmission power levels and aerial fitting locations for R8 (from model year 2007 up to model year 2015)

Designation	P _{max} (Watt)	Specified aerial fitting locations
CB radio (11 m band)	25 (PEP)	Centre of roof (rear)
2 m band	25 (eff.)	Centre of roof (rear)
70 cm band	25 (eff.)	Centre of roof (rear)
23 cm band	10 (PEP)	Centre of roof (rear)
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear)
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability for errors or omissions in this document. Copyright by AUDI AG.

1.60 Transmission power levels and aerial fitting locations for R8 (from model year 2016 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
CB radio (11 m band)	25 (PEP)	Centre of roof (rear)
2 m band (135...175 MHz)	25 (eff.)	Centre of roof (rear)
70 cm band (430...480 MHz)	25 (eff.)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.61 Transmission power levels and aerial fitting locations for R8 Spyder (from model year 2010 up to model year 2016)

Designation	P _{max} (Watt)	Specified aerial fitting locations
CB radio (11 m band)	10 (PEP)	Rear left or right wing
2 m band	10 (eff.)	Rear left or right wing
70 cm band	10 (eff.)	Rear left or right wing
23 cm band	10 (PEP)	Rear left or right wing
Telephone, 900 MHz GSM	10 (PEP)	Rear left or right wing
Telephone, 1800 MHz GSM	10 (PEP)	Rear left or right wing

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.62 Transmission power levels and aerial fitting locations for R8 Spyder (from model year 2017 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
CB radio (11 m band)	10 (PEP)	Rear left wing
2 m band (135...175 MHz)	10 (eff.)	Rear left wing
70 cm band (430...480 MHz)	10 (eff.)	Rear left wing
Telephone, GSM (820...980 MHz)	2 (PEP)	Rear left wing Left/right section of front bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Rear left wing Left/right section of front bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Rear left wing Left/right section of front bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Rear left wing Left/right section of front bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.63 Transmission power levels and aerial fitting locations for TT (from model year 1999 up to model year 2006)

Coupé

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper
4 m band	20 (eff.)	Rear left wing
2 m band	50 (eff.)	Rear of roof (12 cm from roof edge in centre of vehicle) Rear left wing
70 cm band	50 (eff.)	Rear left wing
Telephone, 450 MHz GSM	25 (eff.)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear window, top edge of window "On-Glass"
Telephone, 900 MHz GSM	20 (PEP)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear window, top edge of window "On-Glass" Rear left or right side windows
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing Rear of roof (12 cm from roof edge in centre of vehicle) Rear window, top edge of window "On-Glass" Rear left or right side windows

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Roadster

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	10 (PEP)	Rear bumper
4 m band	10 (eff.)	Centre of rear lid Rear left wing
2 m band	10 (eff.)	Centre of rear lid Rear left wing
70 cm band	10 (eff.)	Centre of rear lid Rear bumper
Telephone, 450 MHz GSM		Centre of rear lid Rear left wing
Telephone, 900 MHz GSM	10 (PEP)	Rear left wing

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability


with respect to the correctness of information in this document. Copyright by AUDI AG.



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, 1800 MHz GSM	10 (PEP)	Rear left wing

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.


1.64 Transmission power levels and aerial fitting locations for TT (from model year 2007 up to model year 2014)

Coupé

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	100 (PEP)	Rear bumper
4 m band	20 (eff.)	Rear left wing
2 m band	50 (eff.)	Centre of roof (rear) Rear left wing
70 cm band	50 (eff.)	Rear left wing
Telephone, 900 MHz GSM	20 (PEP)	Centre of roof (rear) Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side windows
Telephone, 1800 MHz GSM	10 (PEP)	Centre of roof (rear) Rear left wing Rear window, top edge of window "On-Glass" Rear left or right side windows
Bluetooth (2400-2483 MHz)	500 mW	Under front passenger's seat
UMTS network	10 W	Centre of roof (rear)
Short-range radar (76.5 GHz)	< 10 mW	Behind radiator grille

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Roadster

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 54 MHz)	10 (PEP)	Centre of rear lid Rear bumper



Designation	P _{max} (Watt)	Specified aerial fitting locations
4 m band	10 (eff.)	Centre of rear lid Rear left wing
2 m band	10 (eff.)	Centre of rear lid Rear left wing
70 cm band	10 (eff.)	Centre of rear lid Rear bumper
Telephone, 900 MHz GSM	10 (PEP)	Top centre of windscreen
Telephone, 1800 MHz GSM	10 (PEP)	Top centre of windscreen
Bluetooth (2400-2483 MHz)	500 mW	Under front passenger's seat
UMTS network	10 mW	Top centre of windscreen
Short-range radar (76.5 GHz)	< 10 mW	Behind radiator grille

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1.65 Transmission power levels and aerial fitting locations for TT (from model year 2015 onwards)

Coupé

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	20 (eff.)	Centre of roof (rear)
2 m band (135...175 MHz)	50 (eff.)	Centre of roof (rear)
70 cm band (430...480 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)
Telephone, GSM (820...980 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

Roadster

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave (< 30 MHz)	10 (PEP)	Towing bracket
4 m band (64...87.5 MHz)	10 (eff.)	Rear lid
2 m band (135...175 MHz)	10 (eff.)	Rear lid
70 cm band (430...480 MHz)	10 (eff.)	Rear lid
TETRA (380...390, 406...420, 450...470, 800...825, 870...876 MHz)	10 (PEP)	Rear lid
Telephone, GSM (820...980 MHz)	2 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1700...1900 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1900...2100 MHz)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Rear lid Left/right section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.

1.66 Transmission power levels and aerial fitting locations for e-tron (from model year 2019 onwards)

Designation	P _{max} (Watt)	Specified aerial fitting locations
Shortwave/CB radio (< 30 MHz)	100 (PEP)	Towing bracket
4 m band (68...87.5 MHz)	20 (eff.)	Centre of roof (centre), centre of roof (rear)
2 m band (144...174 MHz)	50 (eff.)	Centre of roof (centre), centre of roof (rear)
70 cm band (410...470 MHz)	50 (eff.)	Centre of roof (rear)
TETRA (380...395, 406...420, 450...460, 806...825, 870...876 MHz)	30 (PEP)	Centre of roof (rear)

Copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability

with respect to the correctness of information in this document. Copyright by AUDI AG.



Designation	P _{max} (Watt)	Specified aerial fitting locations
Telephone, GSM (824...850 MHz, 876...915 MHz)	2 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
Telephone, GSM (1710...1785 MHz, 1850...1910 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
Telephone, UMTS network (1885...2025 MHz)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)
LTE (e-UTRA bands 1 to 41 and 44)	1 (PEP)	Centre of roof (rear) (fitting location as standard aerial) Left/right/centre section of rear bumper (fitting location as standard aerial)

eff. = effective transmission power

PEP = Peak Envelope Power



WARNING

If transceivers with higher output are installed, or if the aerial is not fitted at one of the locations specified in the table, the operating permit for the vehicle may be void.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.